


Hand Pump

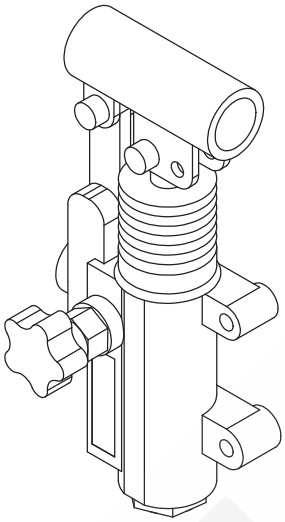

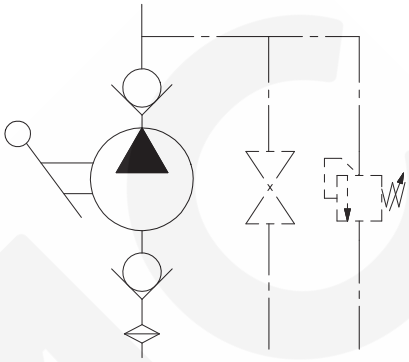

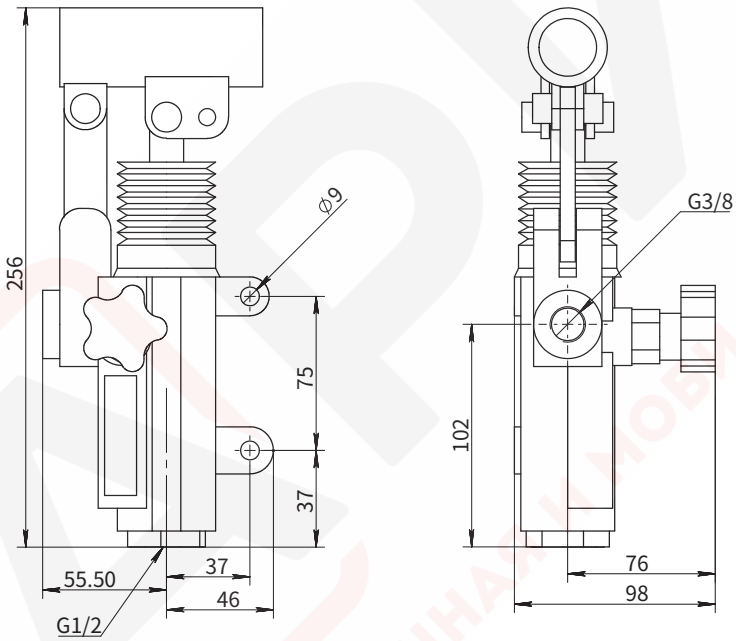

single acting hand pump
for single acting cylinder
for fixing to wall

Specifications:
Cast iron body
Standard colour black
Piston treated with Niploy
White zinc plated support lever
Lever connection ☒ 27
White zinc plated external parts
Pressure relief valve standard

DISPLACEMENT (CC)	A (mm)	B (mm)	C (mm)	ACTALDISPLACEMENT (CC)	OPTIMAL PRESSURE (bar)	MAX PRESSURE (bar)
20	**	**	**	20.090	150	350

THPP-__-__

0=without pressure relief valve
1=with pressure relief valve

0=without release hand knob
1=with release hand knob

ПРОМЫШЛЕННАЯ И МОБИЛЬНАЯ ГИДРАВЛИКА